

# OB SERIES STREET LIGHT






## PRODUCT PICTURE:



## PRODUCT DIMENSION IMAGE (MM):

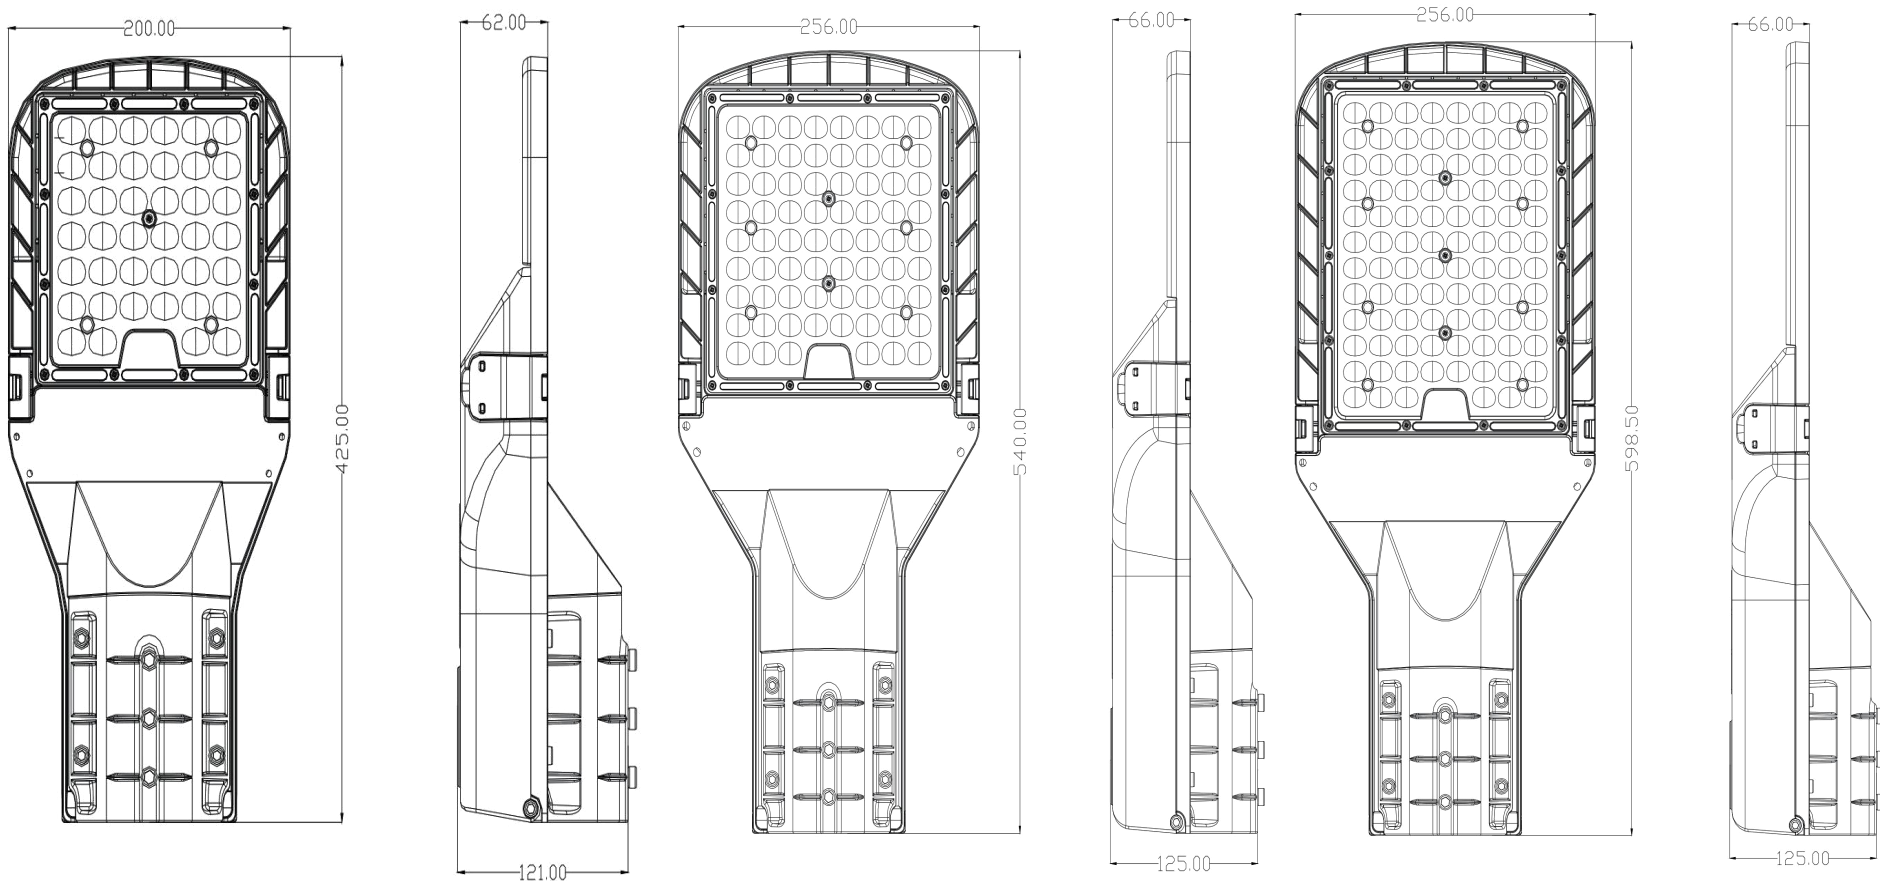



## PRODUCT TECHNICAL PARAMETERS

MODEL NO.	OBLD-50	OBLD-100	OBLD-150
LAMP POWER	50W	100W	150W
INPUT VOLTAGE	AC85-265V	AC85-265V	AC85-265V
FREQUENCY RANGE	50-60Hz	50-60Hz	50-60Hz
PF	>0.9	>0.9	>0.9
LEDs	3030	3030	3030
POWER SUPPLY	EXTERNAL ISOLATION	EXTERNAL ISOLATION	EXTERNAL ISOLATION
BEAM ANGLE	70*150°	70*150°	70*150°
CCT	4000-5500K	4000-5500K	4000-5500K
LUMENS	7500LM	15500LM	22500LM
CRI	>80	>80	>80
HOUSING MATERIAL	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM
PRODUCT SIZE (MM)	425*200*121	540*256*125	589*256*125
IP RATING	IP66	IP66	IP66
WORKING TEMPERATURE	-20°+50°	-20° +50°	-20° +50°
WARRANTY	3 YEARS	3 YEARS	3 YEARS



## PRODUCT CHARACTERISTIC:

- DS LED street light is of immediate ignition eliminating the annoying waiting times that leave entire areas in darkness when the power fails, creating insecurity among pedestrians.
- Shock resistance IK08
- IP65 protection it is protected against any weather change, if its lighting function affects.
- Its wide angle of light manages to reach a greater amount of space, achieving better lighting and more uniformity.

## APPLICATION:

Rural road lighting, Monitoring and lighting of farms, barns, doorways, and courtyards, Homestay, resort, and hotel outdoor lighting, Square, parking lot, playground lighting





## PACKING PICTURE:

