

# TUNNEL HIGH MAST LIGHT TYPE B






## PRODUCT PICTURE:



## PRODUCT DIMENSION IMAGE:

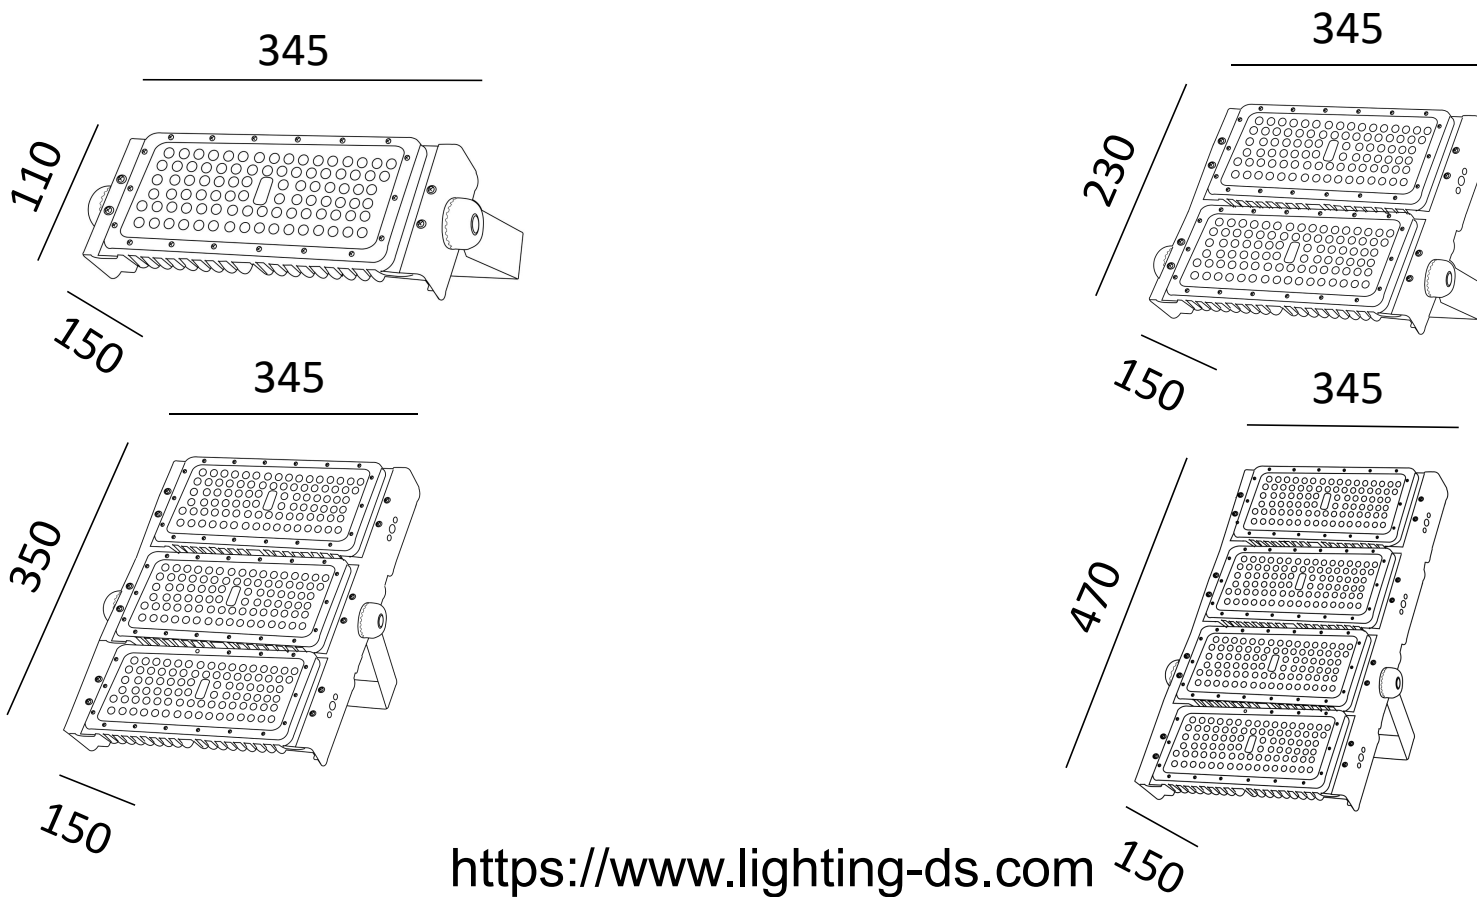



## PRODUCT TECHNICAL PARAMETERS

MODEL NO.	SDGGD-100	SDGGD-200	SDGGD-300	SDGGD-400
LAMP POWER	100W	200W	300W	400W
INPUT VOLTAGE	AC85-265V	AC85-265V	AC85-265V	AC85-265V
FREQUENCY RANGE	50-60Hz	50-60Hz	50-60Hz	50-60Hz
PF	>0.9	>0.9	>0.9	>0.9
LEDs	3030	3030	3030	3030
POWER SUPPLY	EXTERNAL-ISOLATED	EXTERNAL-ISOLATED	EXTERNAL-ISOLATED	EXTERNAL-ISOLATED
BEAM ANGLE	90°	90°	90°	90°
CCT	4000-5500K	4000-5500K	4000-5500K	4000-5500K
LUMENS	11000lm	22000lm	33000lm	45000lm
CRI	>70	>70	>70	>70
HOUSING MATERIAL	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM
PRODUCT SIZE (MM)	110*345*150	230*345*150	350*345*150	470*345*150
IP RATING	IP65	IP65	IP65	IP65
WORKING TEMPERATURE	-20°+50°	-20°+50°	-20°+50°	-20°+50°
WARRANTY	3 YEARS	3 YEARS	3 YEARS	3 YEARS



## PRODUCT CHARACTERISTIC:

- High efficiency - Super bright 110Lm/W
- Top quality driver
- Long lifespan - 50,000hrs
- IP65 waterproof - for indoor outdoor lighting solutions
- High purity module Fin shape aluminum body - largest heatsink area
- With a high level of brightness and uniformity ensuring the safety and security of road tunnel users
- Reduces cost of your electricity bill up to 70% , 60% brighter and 70% energy saving offered the cost-effective solutions the city

## APPLICATION:

Widely used in road, highway, tunnel, country, stadium, village, court, toll stations, airport, plaza, pathway, architecture, industrial facilities etc.

