



GREAT WALL GRAPHENE SERIES LED FLOOD LIGHT






PRODUCT PICTURE:



PRODUCT DIMENSION IMAGE:

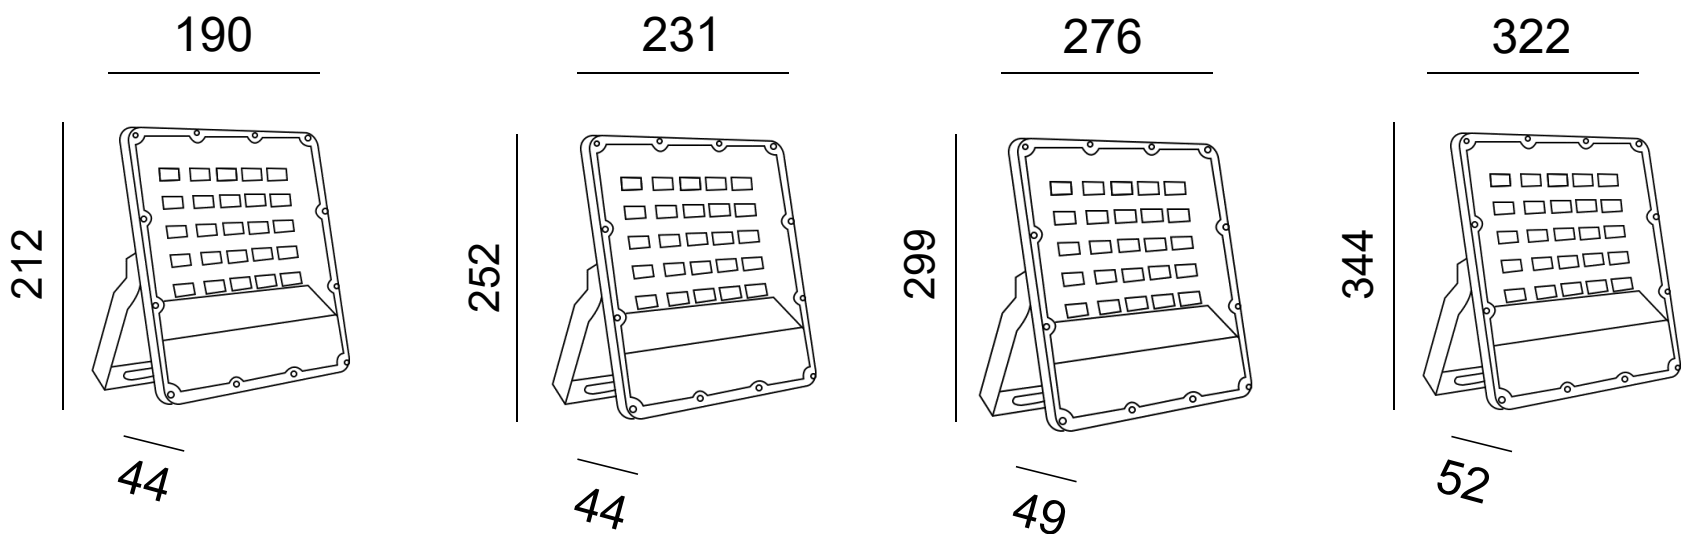



PRODUCT TECHNICAL PARAMETERS

MODEL NO.	CCTGD-30	CCTGD-50	CCTGD-100	CCTGD-200
LAMP POWER	30W	50W	100W	200W
INPUT VOLTAGE	AC85-265V	AC85-265V	AC85-265V	AC85-265V
FREQUENCY RANGE	50-60Hz	50-60Hz	50-60Hz	50-60Hz
PF	>0.5	>0.5	>0.5	>0.5
LEDS	3030	3030	3030	3030
POWER SUPPLY	INTERNAL NON-ISOLATED	INTERNAL NON-ISOLATED	INTERNAL NON-ISOLATED	INTERNAL NON-ISOLATED
BEAM ANGLE	90°	90°	90°	90°
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
LUMENS	2700LM	5000LM	10000LM	20000LM
CRI	>80	>80	>80	>80
HOUSING MATERIAL	GRAPHENE	GRAPHENE	GRAPHENE	GRAPHENE
PRODUCT SIZE (MM)	190*44*212	231*44*252	276*49*299	322*52*344
IP RATING	IP65	IP65	IP65	IP65
WORKING TEMPERATURE	-20°+40°	-20°+40°	-20°+40°	-20°+40°
WARRANTY	3 YEARS	3 YEARS	3 YEARS	3 YEARS



PRODUCT CHARACTERISTIC:

- First-rate heat dissipation backed by industry-leading Graphene technology and cold forge heat sink. The effective cooling system ensures greatest lighting performance, high efficacy, and ultra long lifetime of LED Flood Light
- Energy savings of up to 80%
- No hazardous materials
- It's also 30% lighter than current metal products so it is easier to install
- Various optics are available to suit your facility.
- As these lights produce less heat, so there is less possibility of electrical and fire incidents.

APPLICATION:

Parks and recreation, Sports venues, Airports, Home, Garage, Lawn, Backyard, Tree, Patio, Hallway, Landscaping, and more.

