

BLUE EAGLE TYPE B MODULE SERIES STREET LIGHT




https://www.lighting-ds.com



PRODUCT PICTURE:



PRODUCT DIMENSION IMAGE:

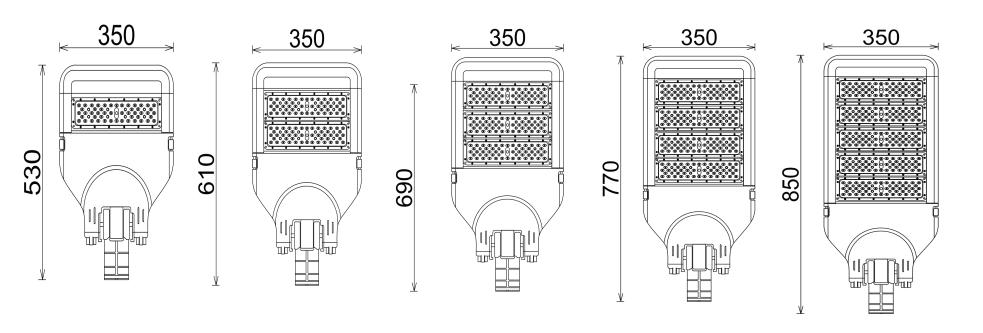

https://www.lighting-ds.com



PRODUCT TECHNICAL PARAMETERS

MODEL NO.	LYMZLD-B50	LYMZLD- B100	LYMZLD- 150	LYMZLD- 200	LYMZLD-250
LAMP POWER	50W	100W	150W	200W	250W
INPUT VOLTAGE	AC85-265V	AC85-265V	AC85-265V	AC85-265V	AC85-265V
FREQUENCY RANGE	50-60Hz	50-60Hz	50-60Hz	50-60Hz	50-60Hz
PF	>0.9	>0.9	>0.9	>0.9	>0.9
LEDs	3030	3030	3030	3030	3030
POWER SUPPLY	EXTERNAL- ISOLATED	EXTERNAL- ISOLATED	EXTERNAL- ISOLATED	EXTERNAL- ISOLATED	EXTERNAL- ISOLATED
BEAM ANGLE	80°-150°	80°-150°	80°-150°	80°-150°	80°-150°
ССТ	4000-5500K	4000-5500K	4000-5500K	4000-5500K	4000-5500K
LUMENS	7500LM	15000LM	22500LM	31000LM	38500LM
CRI	>70	>70	>70	>70	>70
HOUSING MATERIAL	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM	DIE- CASTING ALUMINUM	DIE- CASTING ALUMINUM	DIE- CASTING ALUMINUM
PRODUCT SIZE (MM)	530*350*90	610*350*90	690*350*90	770*350*90	850*350*90
IP RATING	IP65	IP65	IP65	IP65	IP65
WORKING TEMPERATURE	-20°+50°	-20°+50°	-20°+50°	-20°+50°	-20°+50°
WARRANTY	3 YEARS	3 YEARS	3 YEARS	3 YEARS	3 YEARS

https://www.lighting-ds.com



PRODUCT CHARACTERISTIC:

- Modular design, beautiful appearance.
- Large light source area, high efficiency and high brightness.
- It is convenient and quick to replace the module. If a module is broken, there is no need to remove the whole lamp, just replace a new module.
- It is quick and easy to replacing the power supply, and only needs to be manually plugged and unplugged the connector.
- Daily maintenance only requires a screwdriver, greatly reducing maintenance costs.

APPLICATION:

Rural road lighting, Monitoring and lighting of farms, barns, doorways, and courtyards, Homestay, resort, and hotel outdoor lighting, Square, parking lot, playground lighting.



https://www.lighting-ds.com