



FUTURE STREET LIGHT SERIES








PRODUCT PICTURE:



PRODUCT DIMENSION IMAGE:

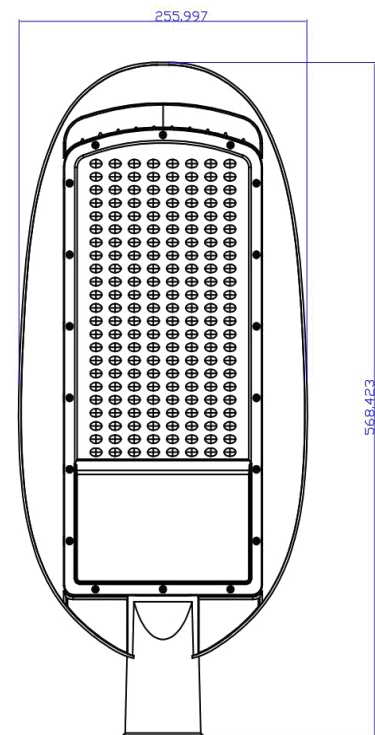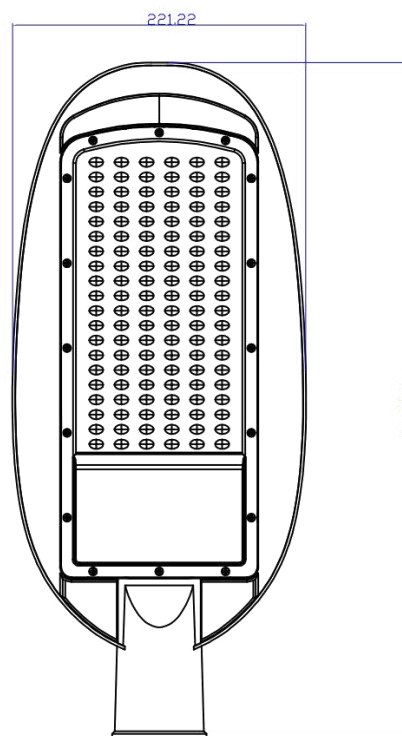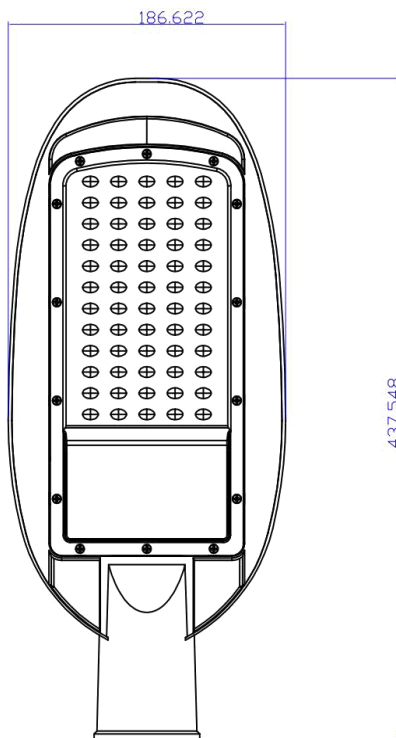



PRODUCT TECHNICAL PARAMETERS

MODEL NO.	WLLD-50	WLLD-100	WLLD-150
LAMP POWER	50W	100W	150W
INPUT VOLTAGE	AC85-265V	AC85-265V	AC85-265V
FREQUENCY RANGE	50-60Hz	50-60Hz	50-60Hz
PF	>0.9	>0.9	>0.9
LEDs	3030	3030	3030
POWER SUPPLY	EXTERNAL- ISOLATED	EXTERNAL- ISOLATED	EXTERNAL- ISOLATED
BEAM ANGLE	90°	90°	90°
CCT	4000-6500K	4000-6500K	4000-6500K
LUMENS	5500LM	11000LM	16500LM
CRI	>70	>70	>70
HOUSING MATERIAL	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM	DIE-CASTING ALUMINUM
PRODUCT SIZE (MM)	438*190*75	520*220*80	570*255*70
IP RATING	IP65	IP65	IP65
WORKING TEMPERATURE	-20°+50°	-20°+50°	-20°+50°
WARRANTY	3 YEARS	3 YEARS	3 YEARS



PRODUCT CHARACTERISTIC:

- DS LED street light is of immediate ignition eliminating the annoying waiting times that leave entire areas in darkness when the power fails, creating insecurity among pedestrians.
- Shock resistance IK08
- IP65 protection it is protected against any weather change, if its lighting function affects.
- Its wide angle of light manages to reach a greater amount of space, achieving better lighting and more uniformity.

APPLICATION:

Rural road lighting, Monitoring and lighting of farms, barns, doorways, and courtyards, Homestay, resort, and hotel outdoor lighting, Square, parking lot, playground lighting

