

# YS SERIES STREET LIGHT






## PRODUCT PICTURE:



## PRODUCT DIMENSION IMAGE:

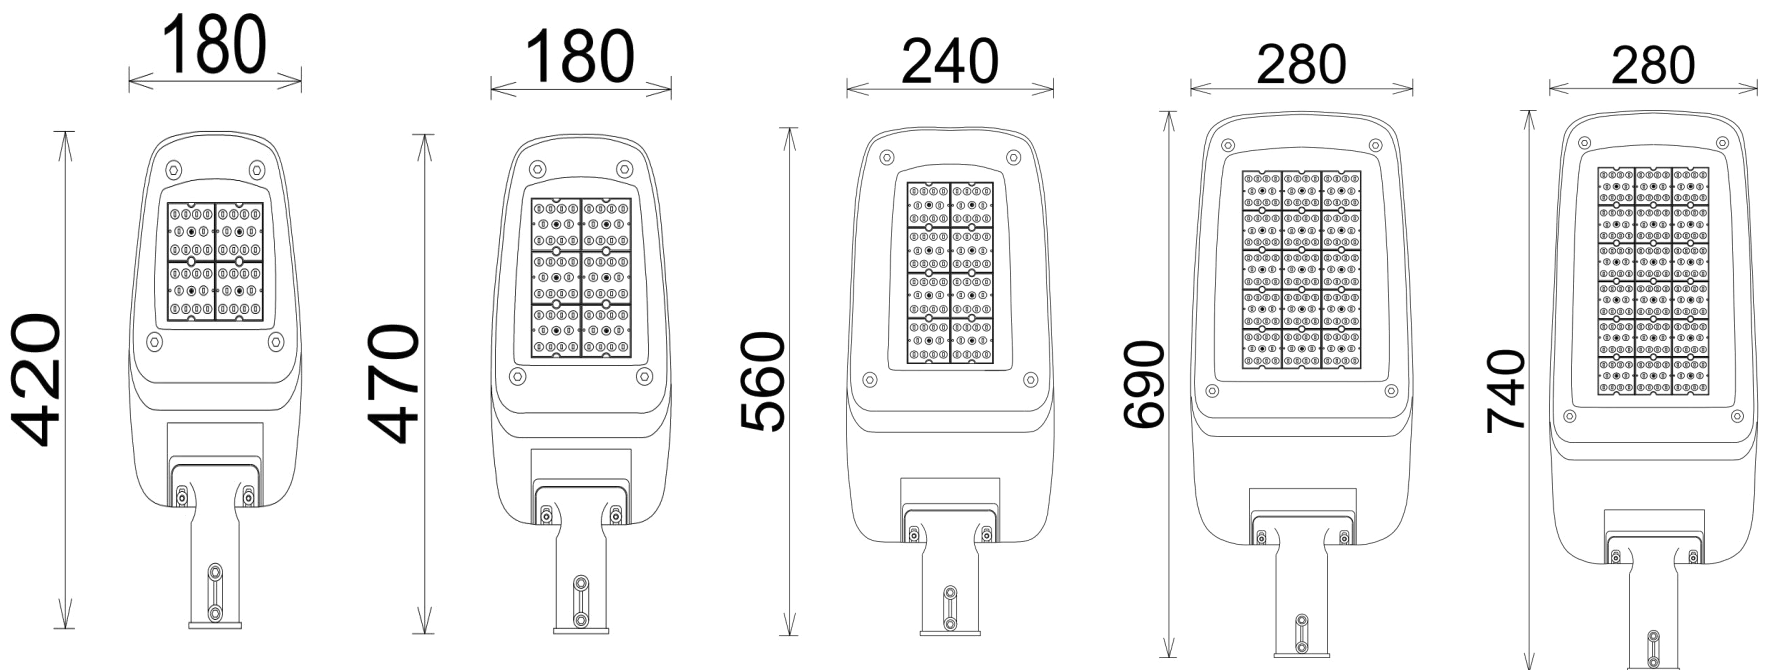



## PRODUCT TECHNICAL PARAMETERS

| MODEL NO.           | YSLD-40              | YSLD-60              | YSLD-100             | YSLD-150             | YSLD-200             |
|---------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| LAMP POWER          | 40W                  | 60W                  | 100W                 | 150W                 | 200W                 |
| INPUT VOLTAGE       | AC85-265V            | AC85-265V            | AC85-265V            | AC85-265V            | AC85-265V            |
| FREQUENCY RANGE     | 50-60Hz              | 50-60Hz              | 50-60Hz              | 50-60Hz              | 50-60Hz              |
| PF                  | >0.9                 | >0.9                 | >0.9                 | >0.9                 | >0.9                 |
| LEDs                | 3030                 | 3030                 | 3030                 | 3030                 | 3030                 |
| POWER SUPPLY        | EXTERNAL-ISOLATED    | EXTERNAL-ISOLATED    | EXTERNAL-ISOLATED    | EXTERNAL-ISOLATED    | EXTERNAL-ISOLATED    |
| BEAM ANGLE          | 80°-150°             | 80° -150°            | 80° -150°            | 80° -150°            | 80° -150°            |
| CCT                 | 4000-5500K           | 4000-5500K           | 4000-5500K           | 4000-5500K           | 4000-5500K           |
| LUMENS              | 5500LM               | 9000LM               | 15000LM              | 22500LM              | 31000LM              |
| CRI                 | >80                  | >80                  | >80                  | >80                  | >80                  |
| HOUSING MATERIAL    | DIE-CASTING ALUMINUM | DIE-CASTING ALUMINUM | DIE-CASTING ALUMINUM | DIE-CASTING ALUMINUM | DIE-CASTING ALUMINUM |
| PRODUCT SIZE (MM)   | 420*180*100          | 470*180*110          | 560*240*115          | 690*280*130          | 740*280*130          |
| IP RATING           | IP65                 | IP65                 | IP65                 | IP65                 | IP65                 |
| WORKING TEMPERATURE | -20°+50°             | -20°+50°             | -20°+50°             | -20°+50°             | -20°+50°             |
| WARRANTY            | 3 YEARS              | 3 YEARS              | 3 YEARS              | 3 YEARS              | 3 YEARS              |



## PRODUCT CHARACTERISTIC:

- DS LED street light is of immediate ignition eliminating the annoying waiting times that leave entire areas in darkness when the power fails, creating insecurity among pedestrians.
- Shock resistance IK08
- IP65 protection it is protected against any weather change, if its lighting function affects.
- Its wide angle of light manages to reach a greater amount of space, achieving better lighting and more uniformity.

## APPLICATION:

Rural road lighting, Monitoring and lighting of farms, barns, doorways, and courtyards, Homestay, resort, and hotel outdoor lighting, Square, parking lot, playground lighting

